



PRODUCT CATALOGUE

Far Infrared Carbon Crystal Heating Panel

ABOUT US

Infrared Heating Supplies (IHS) is based in Bolton, Great Britain, and started trading in July 2016. IHS has been quick to establish itself as one of the leading providers of infrared heating in the United Kingdom. Offering competitively priced products, strong product guarantees, the right product certifications and with a great UK delivery service. IHS is regarded as one of the best available supplier in the market today of FAR infrared heating panels. With our team of experienced staff and continued investment in research and development, we are absolutely confident in our products.

OUR CORE VALUES

Quality: Our products undergo a certified quality standards procedure to make sure we only stock items with the newest and most reliable technology. All our sub contracted factories are all certified with ISO 9001.

Price: We believe that infrared heating should be accessible to all of our customers, which is why we offer a very competitive price

Environment: IHS products can save up to 90% energy than traditional alternatives. This leads to a huge reduction in carbon emissions that helps keep our planet greener and your bills leaner

Customer Service: We give our customers confidence through our 30 day return policy and 5 year warranties.

CONTENTS

IC SERIES 3

UV PRINTS 5

FRAMELESS SERIES 7

MIRROR SERIES 9

GLASS SERIES 11

CURVED SERIES 13


UNDERFLOOR HEATING 15

THERMOSTATS 17

ACCESSORIES 18

IC SERIES

FAR INFRARED
CARBON CRYSTAL
HEATING PANEL

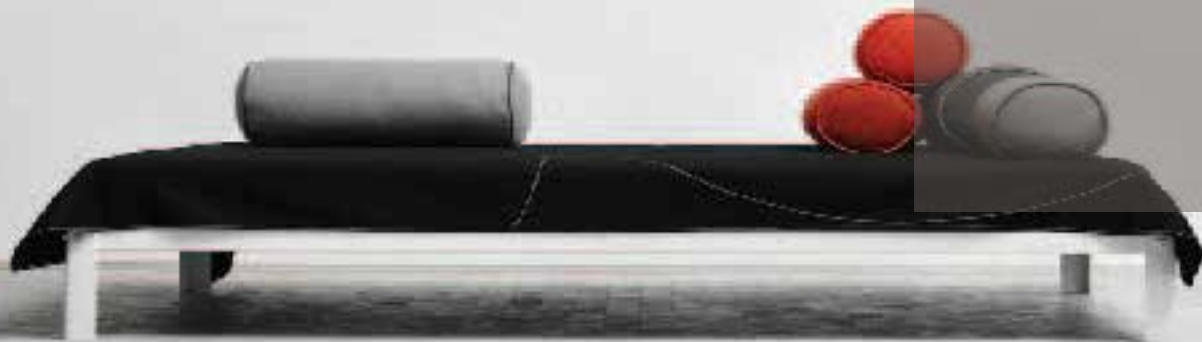

IC SERIES

PANEL - IC SERIES - PET SURFACE

DIMENSIONS

595x335x22mm
1005x335x22mm
595x595x22mm
505x905x22mm
1005x595x22mm
1195x595x22mm
1195x805x22mm
1195x1005x22mm

WATTAGE

200w
330w
360w
450w
600w
720w
960w
1200w

PRODUCT CODE

PH6030IC200P
PH10030IC330P
PH6060IC360P
PH5090IC450P
PH10060IC600P
PH12060IC720P
PH12080IC960P
PH120100IC200P

- Working Voltage: 220 - 240v AC, 50/60 Hz
 - Lifespan: 100,000hrs
 - Front Surface Temperature: 90 - 110°C
 - Energy Transfer Ratio: 98%
 - Materials: White Carbon Crystal Heating Film
 - Protection: inner temperature control device protects against overheating
-
- 3mm insulation layer
 - White or customised images with hang bracket
 - Easy to install
 - 1.5mm thick aluminium back plate
 - Thickness of the complete panel is 2.2cm
 - Can be wall mounted, ceiling mounted or free standing



UV PRINTS

PANEL IC SERIES
UV PRINTS



UV PRINTS

PANEL - IC SERIES - UV PRINT

DIMENSIONS

595x335x22mm
1005x335x22mm
595x595x22mm
505x905x22mm
1005x595x22mm
1195x595x22mm
1195x805x22mm
1195x1005x22mm

WATTAGE

200w
330w
360w
450w
600w
720w
960w
1200w

PRODUCT CODE

PH6030IC200UV
PH10030IC330UV
PH6060IC36UV
PH5090IC450UV
PH10060IC600UV
PH12060IC720UV
PH12080IC960UV
PH120100IC200UV

PANEL - FRAMELESS- UV PRINT

DIMENSIONS

595x595x14mm
1198x598x14mm
1210x820x14mm
1210x1020x14mm

WATTAGE

360w
720w
960w
1200w

PRODUCT CODE

FH606NF360UV
FH12060NF720UV
FH12080NF960UV
FH120100NF1200UV



- Heating Panels with custom images or bespoke prints
- Chose a custom image or send us an image of choice



FRAMELESS SERIES

FRAMELESS HEATING
PANEL

FRAMELESS SERIES

PANEL - FRAMELESS SERIES ALUMINIUM WHITE SURFACE

DIMENSIONS

595x595x14mm
1198x598x14mm
1210x820x14mm
1210x1020x14mm

WATTAGE

360w
720w
960w
1200w

PRODUCT CODE

FH606NF360A
FH12060NF720A
FH12080NF960A
FH120100NF1200A

- Working Voltage: 220 - 240v AC, 50/60 Hz
- Lifespan: 100,000hrs
- Front Surface Temperature: 90 - 110°C
- Energy Transfer Ratio: 98%
- Cable: 3m with VDE certificate
- Materials: White Carbon Crystal Heating Film
- Protection: inner temperature control device protects against overheating

- White or black surface
- 1mm thick aluminium back plate
- Thickness of the complete panel is 1.4cm
- Can be wall mounted, ceiling mounted or free standing



MIRROR SERIES



MIRROR SERIES

MIRROR SERIES ROUND

DIMENSIONS

850mm

WATTAGE

360w

PRODUCT CODE

MH850M360

MIRROR SERIES RECTANGLE

DIMENSIONS

700x600mm

1000x600mm

1300x900mm

WATTAGE

300w

450w

960w

PRODUCT CODE

MH7060M300

MH10060M450

MH13090M960

- Working Voltage: 220 - 240v AC, 50/60 Hz
- Lifespan: 100,000H
- Front Surface Temperature: 90 - 110°C
- Energy Transfer Ratio: 98%
- Cable: 3m with VDE certificate
- Materials: White Carbon Crystal Heating Film
- Protection: inner temperature control device protects against overheating



GLASS SERIES



GLASS SERIES

GLASS SERIES ROUND

DIMENSIONS

850mm
850mm
850mm

WATTAGE

360w
360w
360w

PRODUCT CODE

GH850G360B
GH850G360G
GH850G360W

GLASS SERIES RECTANGLE

DIMENSIONS

1000x600mm
1000x600mm
1000x600mm

WATTAGE

450w
450w
450w

PRODUCT CODE

GH10060G450B
GH10060G450G
GH10060G450W

- Working Voltage: 220 - 240v AC, 50/60 Hz
- Lifespan: 100,000hrs
- Front Surface Temperature: 90 - 110°C
- Energy Transfer Ratio: 98%
- Cable: 3m with VDE certificate
- Materials: Carbon Crystal Heating Element / Glass Surface
- Protection: inner temperature control device protects against overheating



COLOURS:





CURVED SERIES

CURVED SERIES

CURVED SERIES - SFH - FREE STANDING

DIMENSIONS

505x555x75mm

WATTAGE

300w

PRODUCT CODE

CH5055C300P

CURVED SERIES - SFH - UV PRINT

DIMENSIONS

505x555x75mm

WATTAGE

300w


PRODUCT CODE

CH5055C300UV


- Working Voltage: 220 - 240v AC, 50/60 Hz
- Lifespan: 100,000hrs
- Front Surface Temperature: 90 - 110°C
- Energy Transfer Ratio: 98%
- Cable: 2m with VDE certificate
- Materials: Carbon Crystal Heating Element / PET Surface
- Protection: inner temperature control device protects against overheating




UNDERFLOOR HEATING

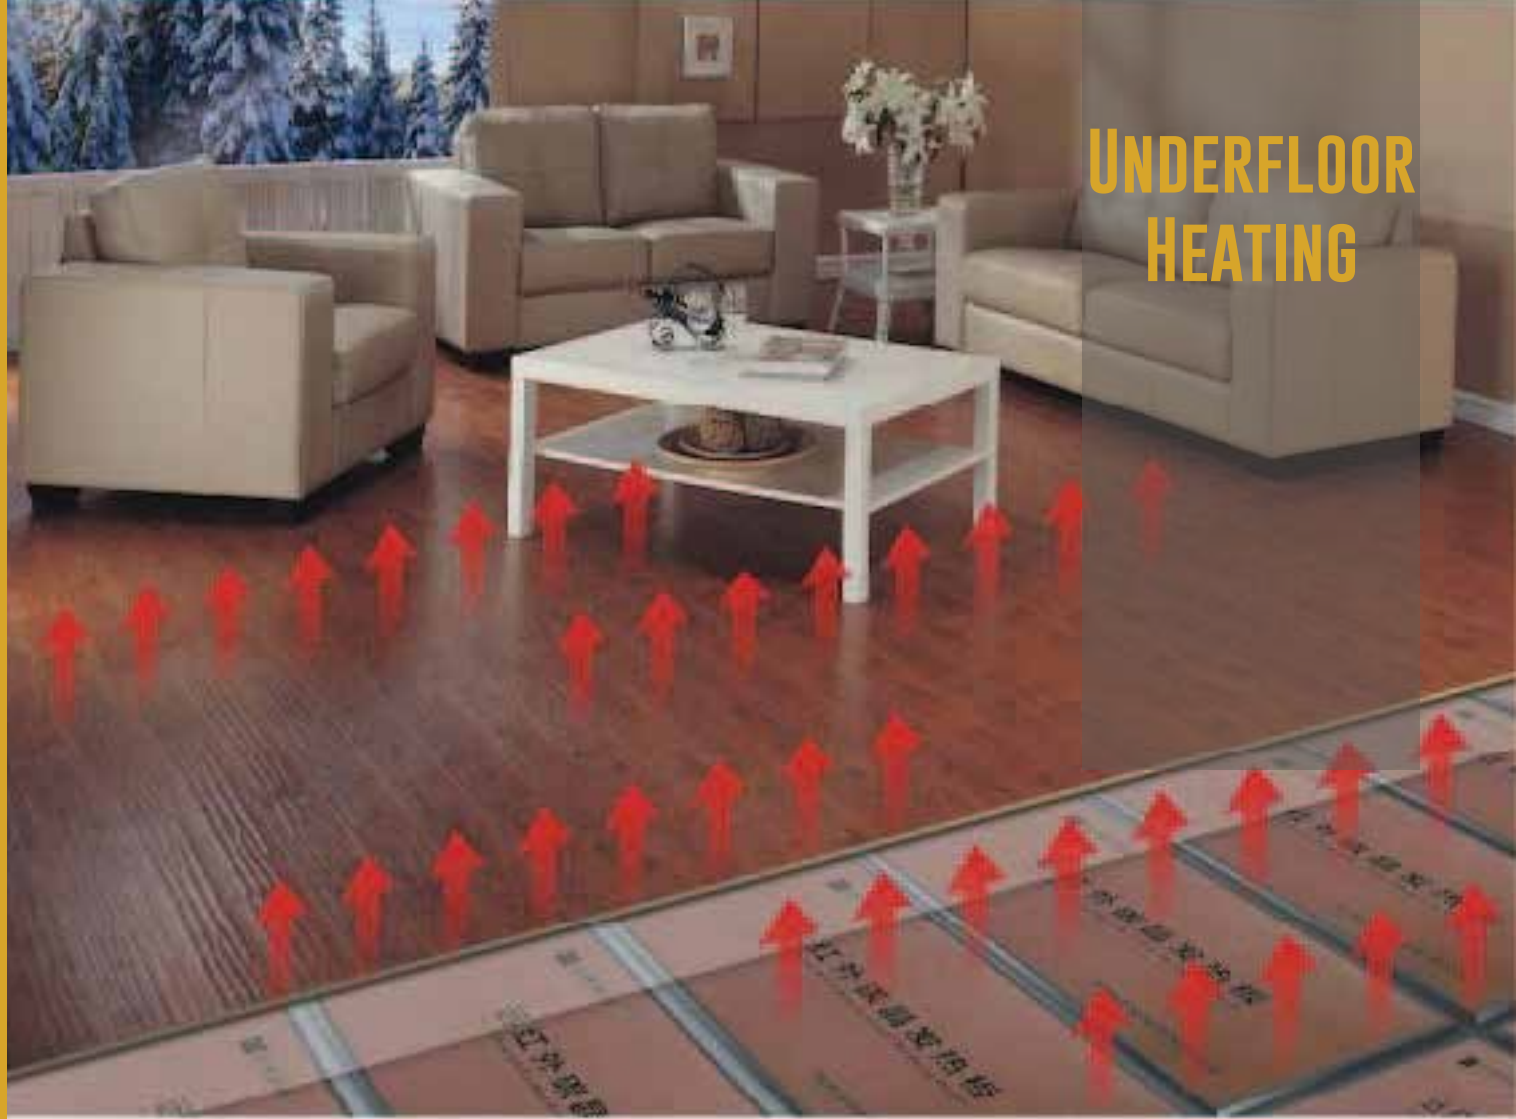


UNDERFLOOR HEATING

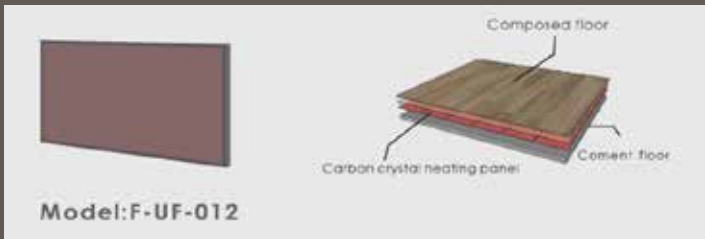

MODEL	WATTAGE (±10%)	WEIGHT (kg)	SIZE (mm)	FRAME COLOUR
F-UF-012	120w	1.8	600x100x21	Gray

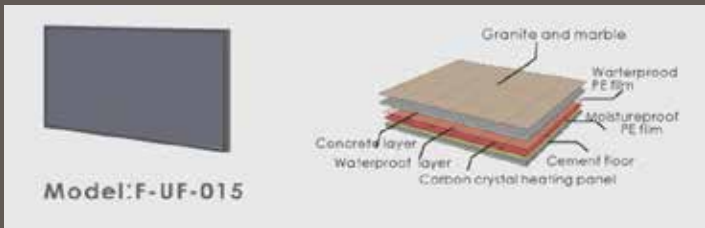

MODEL	WATTAGE (±5%)	WEIGHT (kg)	SIZE (mm)	FRAME COLOUR
F-UF-015	150w	1.5	600x100x21	Gray

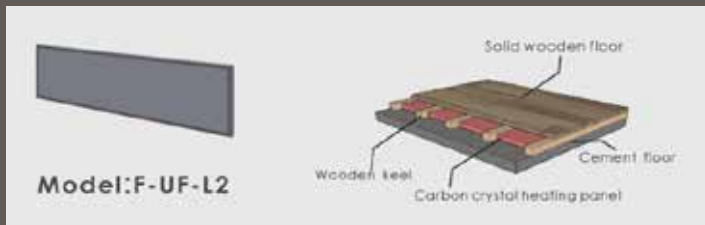

MODEL	WATTAGE (±5%)	WEIGHT (kg)	SIZE (mm)	FRAME COLOUR
F-UF-L2	50w	0.7	245x1005x24	Gray

UNDERFLOOR HEATING

DIMENSIONS	WATTAGE	PRODUCT CODE
1000x600mm	120 -150w	UH10060U150

THERMOSTATS

THERMOSTAT 13 - 16A

CONNECT MULTIPLE PANELS UP TO THE THERMOSTATS RATED WATTAGE



2200W



2200W



3680W



2200W

WITH WIRELESS RECEIVER



2200W

ACCESSORIES

ALUMINIUM STAND FEET SIZE: 230X110X28



CEILING SUSPENSION KIT



TOWEL BEAMS LENGTH: 36CM AND 23CM





Tel: +44 (0)1204 520544

Email: info@infraredheatingsupplies.com

Website: www.infraredheatingsupplies.com

Address: Unit 3, Lincoln Mill, Washington Street, BL3 5EY