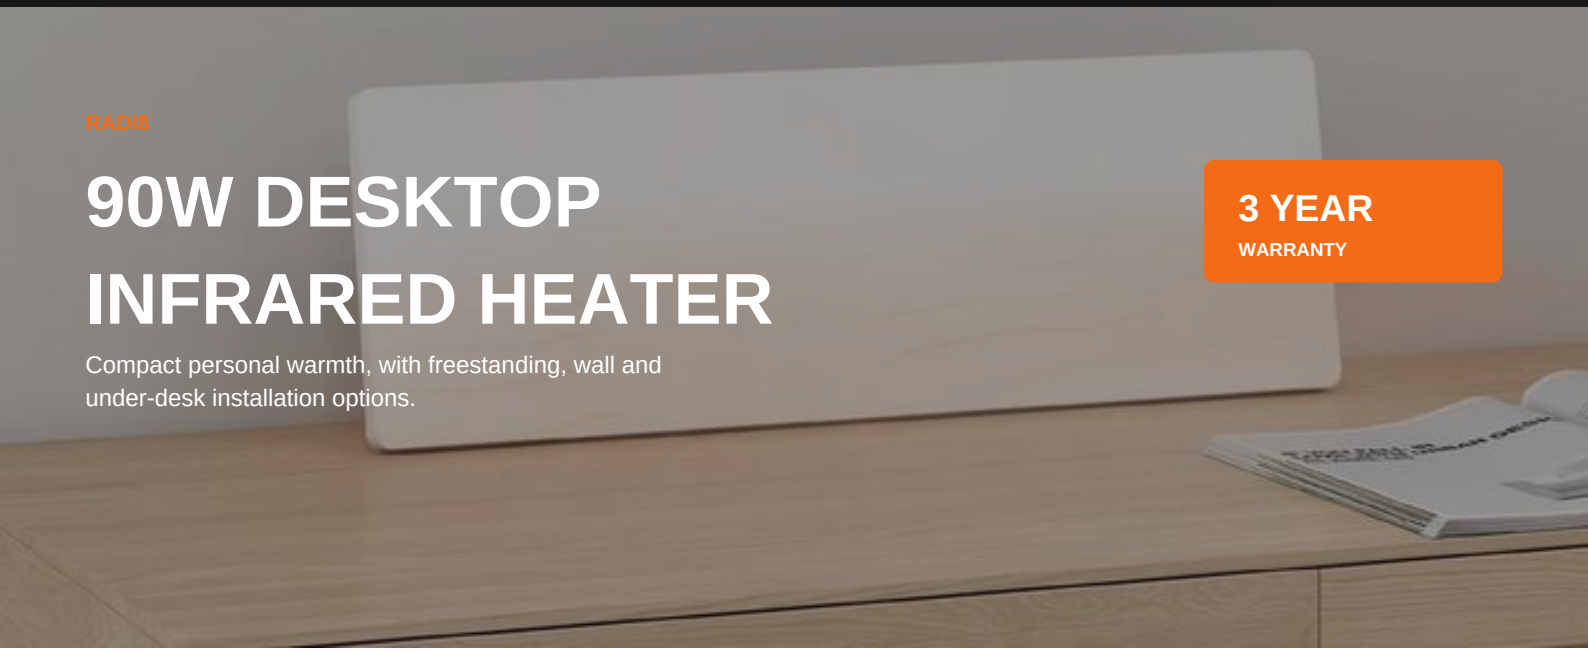


RADI8

90W DESKTOP INFRARED HEATER

Compact personal warmth, with freestanding, wall and under-desk installation options.

3 YEAR
WARRANTY

PERSONAL WARMTH. FLEXIBLE POSITIONING.

The RADI8 90W panel provides localised infrared warmth for your workspace. Use the included rear support rod for freestanding operation, or fit the appropriate optional brackets for under-desk personal heating or local wall warming.

90W	IP20	UP TO 125°C	615 × 216 × 17mm
Rated heating output	Dry indoor use	Heating surface	Overall dimensions

01

PERSONAL HEATING

90W maximum output

Carbon infrared heating with a ceramic-coated surface for localised, supplementary warmth.

02

THREE HEATING LEVELS

Time-based operation


Select 30%, 60% or 100% operating time with the rotary knob. These are not room-temperature settings.

03

THREE MOUNTING METHODS

Optional bracket kits

Freestanding support rod included. Wall and under-desk brackets available separately.

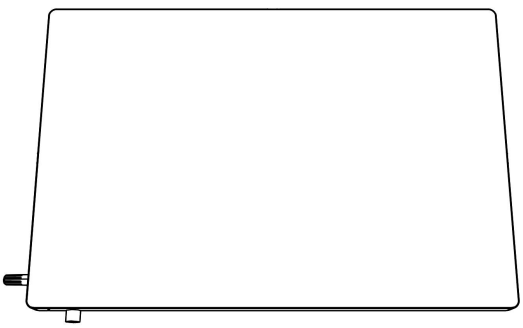

COMPACT PANEL. CLEAR OPERATING CONTROLS.

A slim aluminium frame, infrared ceramic-coated front and clad-steel rear. The included support rod holds the panel in its intended tilted standing position.

Typical applications

Home offices • Desks • Personal workspaces

90W DESKTOP INFRARED HEATER

Technical specification

Model DT603203GC90 | Localised personal heating and wall warming.

MODEL / SKU	W	OVERALL SIZE (MM)	WEIGHT	IP	SURFACE
DT603203GC90	90	615 × 216 × 17	1.1kg	IP20	Up to 125°C

Length and height include the sensor and knob. Body depth excludes mounting brackets.
Supply: 220-240V AC / 50Hz. Power cable: 1.9m. Heating element: carbon.

CONSTRUCTION

Carbon heating element, infrared ceramic-coated front, aluminium frame and clad-steel rear. Maximum heating-surface temperature is 125°C in all permitted mounting positions.

ELECTRICAL

Supplied with a UK three-pin plug. Use a suitable earthed 220-240V, 50Hz socket. Do not supply through an external timer or a circuit regularly switched on and off automatically.

CONTROLS & PROTECTION

Rotary OFF / 30% / 60% / 100% settings control heating operating time. The element draws its rated power while heating. Red indicator stays on at all heating levels, including pauses. Built-in sensor and overheating protection.

INSTALLATION

Freestanding using the included rear support rod. Optional wall and under-desk bracket kits are available separately. Under-desk mounting is for suitable wooden desks, heating surface down. No ceiling mounting.

POSITIONING & CLEARANCES

Keep the user's body, clothing and surrounding objects at least 100mm from the heater. Wall mounting uses the Z brackets with the heating surface facing the wall for local wall warming, not whole-room heating. Wall-to-heating-surface spacing: 25mm. Under-desk rear-to-desk gap: 3mm. Follow the manual for the bracket-defined installation spacing.

DRY INDOOR USE

IP20 provides no protection against water. Do not use near baths, showers, pools or other water containers. Keep the temperature sensor uncovered and the cable clear of hot surfaces.

INSTALLATION, CARE & WARRANTY

Keep the heater uncovered. Switch off, unplug and allow it to cool before moving or cleaning. Wipe with a soft, lint-free cloth lightly dampened with water. Do not immerse, spray or use abrasive cleaners. Follow the supplied manual and warranty terms.

3 YEAR
WARRANTY