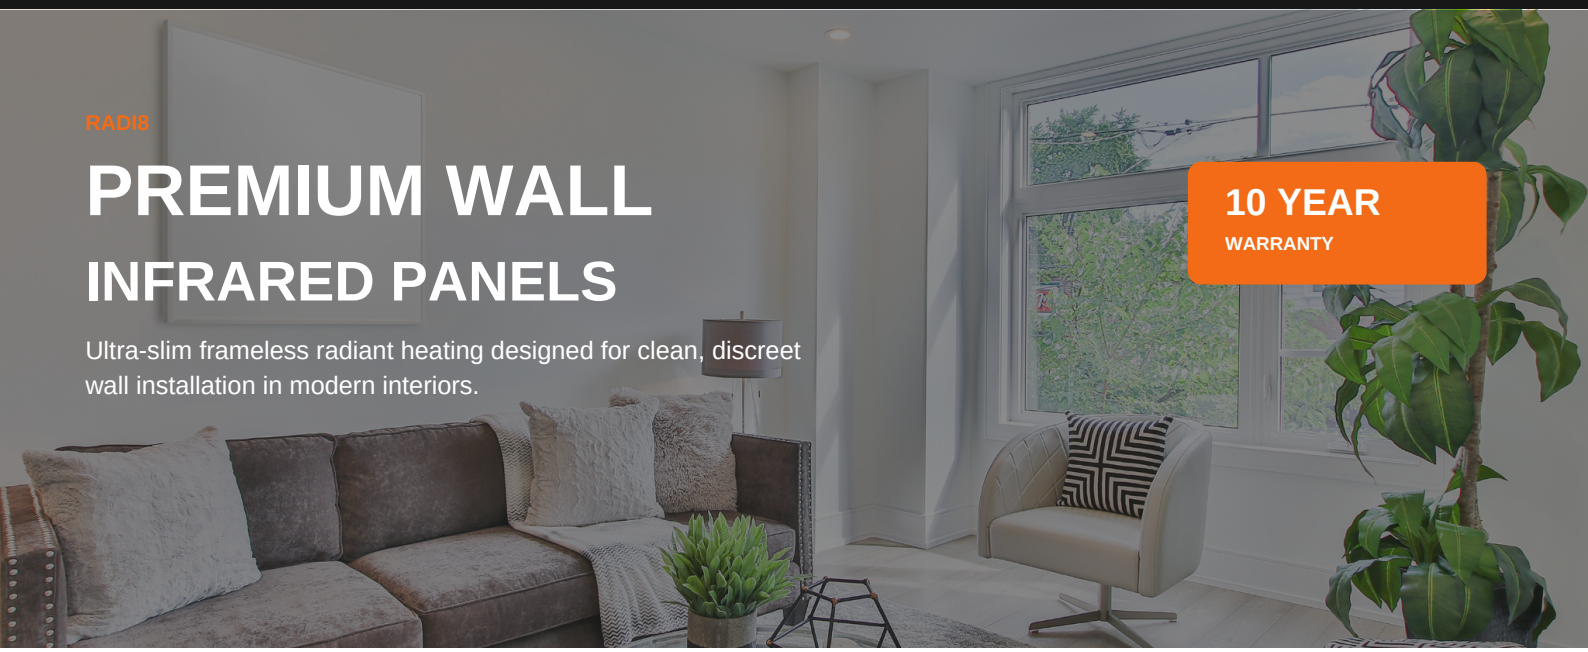


RADI8

PREMIUM WALL INFRARED PANELS

Ultra-slim frameless radiant heating designed for clean, discreet wall installation in modern interiors.

10 YEAR
WARRANTY

MINIMAL DESIGN. FOUR HEATING OUTPUTS.

RADI8 Premium Wall Panels combine a slim frameless white finish with carbon infrared heating. Available in 350W, 450W, 580W and 700W outputs, each model can be paired with a compatible external thermostat for temperature control and scheduling.

350-700W	IP20	85-95°C	WALL
Heating output	Excluding the plug	Surface temperature	Fixed installation

01

FRAMELESS DESIGN

Super-slim white finish

A clean borderless aluminium surface designed to sit discreetly on the wall without the visual weight of a traditional radiator.

02

FOUR OUTPUTS

350W to 700W range

Four sizes provide flexible specification for bedrooms, living spaces, offices and other residential or commercial interiors.

03

SMART CONTROL READY

External thermostat control

Pair with our black or white Wi-Fi thermostat for temperature control, Netmostat app access and 7-day scheduling. Available separately.

CLEAN LINES. DISCREET RADIANT HEAT.

A slim frameless wall-mounted infrared heater with a powder-coated aluminium surface, combining minimalist styling with silent radiant heating and no moving components.

Typical applications

Homes • Bedrooms • Offices • Hotels • Retail • Living spaces

PREMIUM WALL PANEL RANGE

Technical specification

Four core models across four outputs in a super-slim frameless white finish.

MODEL / SKU	W	DIMENSIONS (MM)	CONTROL	WEIGHT	IP	SURFACE
Frameless / FH6060G350A	**350**	595 x 595 x 25	External thermostat	5.65 kg	IP20	85-95°C
Frameless / FH7060G450A	**450**	705 x 605 x 25	External thermostat	6.35 kg	IP20	85-95°C
Frameless / FH10060G580A	**580**	1005 x 605 x 25	External thermostat	8.5 kg	IP20	85-95°C
Frameless / FH12060G700A	**700**	1195 x 595 x 25	External thermostat	10.25 kg	IP20	85-95°C

CONSTRUCTION

Powder-coated aluminium front with a carbon heating element. Body depth is 25mm; total depth including rear mounting brackets and junction box is 40mm for all four models.

ELECTRICAL

220-240V AC / 50Hz. Supplied with a UK 13A 3-pin plug. We always recommend hardwiring via a suitable fused spur for permanent installation. A qualified electrician must complete hardwiring and external thermostat connections.

PROTECTION

IP20, excluding the plug, with overheating protection. UKCA, CE and RoHS. Lot 20 compliance depends on use with suitable external heating controls.

INSTALLATION

Fixed wall mounting only, horizontally or vertically. Not suitable for ceiling mounting or portable use. Follow the supplied manual for suitable wall fixings and recommended installation clearances.

BATHROOM USE

IP20 - Suitable for bathrooms outside zones 0, 1 and 2, away from splashes or sprays. Install only in a suitable dry location. Bathroom installation must be carried out by a qualified electrician in accordance with applicable electrical installation requirements. Switches and controls must be out of reach of someone using the bath or shower.

INSTALLATION, CARE & WARRANTY

Minimal ongoing maintenance. Before cleaning, switch off, disconnect from the electrical supply and allow to cool completely. Wipe with a soft, lint-free cloth lightly dampened with water. Do not use abrasive cleaners or immerse in water. Allow to dry before reconnecting. Follow the supplied manual and warranty terms.

10 YEAR
WARRANTY