

RADI8

LED LIGHT + INFRARED CEILING PANELS

10 YEAR
WARRANTY

Integrated radiant heating and dimmable LED lighting in one slim ceiling-mounted panel.

HEATING AND LIGHTING. ONE CLEAN CEILING SOLUTION.

RADI8 LED ceiling panels combine far infrared radiant heating with an integrated, dimmable LED light. Available in 400W, 700W and 840W outputs, with built-in thermostat or thermostat + Wi-Fi control.

IP54

Splash & dust resistant

75-95°C

Operating surface

220-240V

50Hz supply

3000-6000K

Dimmable CCT lighting

01

BUILT-IN THERMOSTAT

Remote control included

Integrated temperature and timer control with separate light operation.

02

THERMOSTAT + WI-FI

App + remote control


Wi-Fi connectivity for app-based heating control with remote operation.

03

INTEGRATED LED

CCT adjustable + dimmable

Warm 3000K, daylight 4200K and cool 6000K lighting with brightness control.

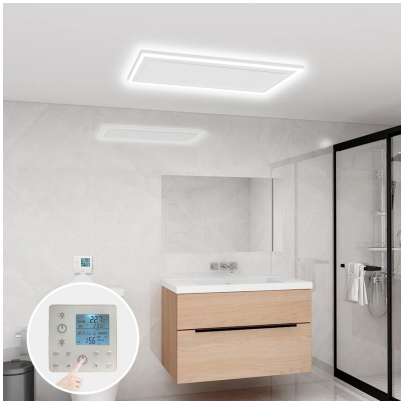

DESIGNED FOR DUAL FUNCTION

A low-profile ceiling heater with perimeter LED lighting, designed for rooms where heating and lighting zones overlap.

Typical applications



Bathrooms • Bedrooms • Offices • Clinics • Utility rooms

LED LIGHT + HEATER RANGE

Technical specification

Six core models across three heating outputs and two control configurations.

MODEL / SKU	W	DIMENSIONS (MM)	CONTROL	WEIGHT	IP	SURFACE
Thermostat LHP6060HHL400	400	655 x 630 x 33	Built-in + remote	6.7 kg	IP54	75-95°C
Thermostat LHP10060HHL700	700	1080 x 630 x 33	Built-in + remote	9.3 kg	IP54	75-95°C
Thermostat LHP12060HHL840	840	1280 x 630 x 33	Built-in + remote	10.3 kg	IP54	75-95°C
Wi-Fi LHP6060HHL400-WIFI	400	655 x 630 x 33	Wi-Fi + remote	6.7 kg	IP54	75-95°C
Wi-Fi LHP10060HHL700-WIFI	700	1080 x 630 x 33	Wi-Fi + remote	9.3 kg	IP54	75-95°C
Wi-Fi LHP12060HHL840-WIFI	840	1280 x 630 x 33	Wi-Fi + remote	10.3 kg	IP54	75-95°C

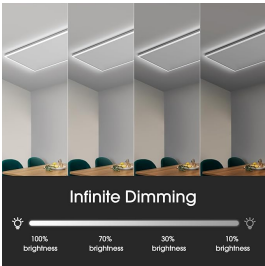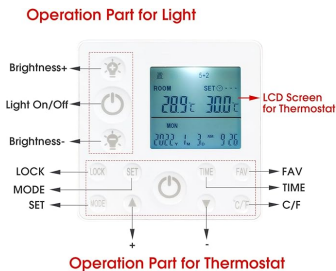

LIGHTING

CCT adjustable and dimmable LED. 3000K warm white, 4200K daylight and 6000K cool white. Heating and lighting can be controlled separately.

ELECTRICAL

220-240V AC / 50Hz. Fixed ceiling installation. The panel must be hardwired by a qualified electrician.

CONSTRUCTION

Premium IR ceramic-coated surface with aluminium frame and carbon-crystal infrared heating element.

INSTALLATION

Designed for flat ceiling fixing only. Not suitable for wall mounting, suspended grid ceilings or portable use.

INSTALLATION, CARE & WARRANTY

No pumps, fans or complex moving components. When switched off and cool, the surface can be cleaned with a soft damp cloth. Installation must follow the supplied instructions and applicable electrical requirements.

10 YEAR
WARRANTY