

RADI8

MIRROR INFRARED HEATING PANELS

Tempered-mirror radiant heating for bathrooms and modern interiors, with standard, thermostat and LED options.


10 YEAR
WARRANTY

ONE RANGE. THREE CONTROL OPTIONS.

RADI8 mirror infrared panels combine a practical tempered mirror with low-profile radiant heating. The range includes standard external-control models, a built-in thermostat model with remote control, and selected LED-backlit thermostat models in 320W to 700W

320-700W Heating output	IP54 Splash & dust protection	70-90 C Surface temperature	WALL Fixed installation
-----------------------------------	---	---------------------------------------	-----------------------------------

01 STANDARD External thermostatic control Standard mirror panels can be paired with a compatible RADI8 thermostat for temperature control, scheduling and zoning.	02 BUILT-IN THERMOSTAT Remote control included The 450W thermostat mirror includes integrated temperature and timer control with a handheld remote.	03 LED + THERMOSTAT Mirror, heat + LED light Selected 450W and 580W models combine infrared heating, 6000K LED lighting and built-in thermostat control.
---	---	--

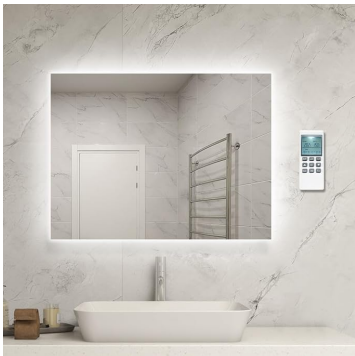

DESIGNED FOR BATHROOMS & INTERIORS

A slim wall-mounted heater with a tempered mirror surface, designed for spaces where heating and mirror functionality can be combined in one discreet product.

Typical applications

Bathrooms • En-suites • Dressing areas • Hotels • Hallways

MIRROR INFRARED PANEL RANGE

Technical specification

Eight models across standard, built-in thermostat and LED-backlit control configurations.

MODEL / SKU	W	DIMENSIONS (MM)	CONTROL	WEIGHT	IP	SURFACE
Standard / MH850M320	320	850 round x 12	External thermostat	15 kg	IP54	70-90 C
Standard / MH6060M320	320	600 x 600 x 12	External thermostat	9.55 kg	IP54	70-90 C
Standard / MH8060M450	450	800 x 600 x 12	External thermostat	12.3 kg	IP54	70-90 C
Standard / MH10060M580	580	1000 x 600 x 12	External thermostat	15.15 kg	IP54	70-90 C
Standard / MH12060M700	700	1200 x 600 x 12	External thermostat	17.85 kg	IP54	70-90 C
Thermostat / MH8060M450-REMOTE	450	800 x 600 x 35	Built-in + remote	12.3 kg	IP54	70-90 C
LED / MH8060M450-REMOTE-LED	450	800 x 600 x 35	Built-in + remote	12.3 kg	IP54	70-90 C
LED / MH10060M580-REMOTE-LED	580	1000 x 600 x 35	Built-in + remote	15.15 kg	IP54	70-90 C

CONSTRUCTION

Tempered mirror front surface with carbon-crystal infrared heating technology. Slim standard models are 12 mm deep; integrated-control models are 35 mm deep.

ELECTRICAL

220-240V AC / 50Hz. Standard models are supplied with a 13A UK plug and may be hardwired via a thermostat and fused spur where required.

PROTECTION

IP54 rated for splash and dust resistance with overheat protection. Published conformity markings include UKCA, CE and RoHS; Lot 20 applies where relevant.

INSTALLATION

Designed for fixed wall mounting using the supplied brackets. Bathroom installations and hardwired connections should be completed in the correct electrical zone by a qualified electrician.

INSTALLATION, CARE & WARRANTY

Mirror panels have no pumps or fans and require minimal ongoing maintenance. Clean only when switched off and cool using a soft damp cloth. Install in accordance with the supplied instructions and applicable electrical requirements, particularly for bathroom locations.

10 YEAR
WARRANTY